





# MOTION SENSOR INSTRUCTION



Thanks for  
Choosing our WiFi Smart Home Sensors

## Product Configuration

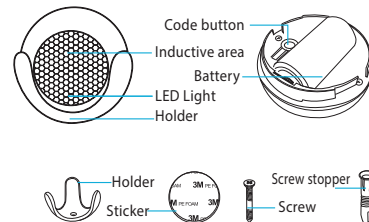

## Specifications

Battery: CR123A-3V X 1  
 Standby current: 34uA  
 Alarm current: 75mA-90mA  
 Standby time: 5 years  
 Battery Life: 2500 times trigger(1 year if trigger 7 times per day, 2 years if trigger 3 times per day)  
 Wireless type: 2.4GHz  
 Wireless standard: IEEE 802.11b/g/n  
 Wireless range: 45M  
 Sensitive distance: 6M  
 Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)  
 Operating Humidity: 20% ~ 85%  
 Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)  
 Storage Humidity: 0% ~ 90%  
 Size: 50mm x 48mm x 48mm

## LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	LED will rapidly blink, and OFF after scheduled time
Suspend mode	Indicator off
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode

### How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

## Get Started with Tuya Smart App

### 1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




### 2. Register and Login

- Launch the "Smart life" app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.
- Login if you have an account already.**

### 3. Add Device

- Power on the smart sensor which default's mode is Smart WiFi mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- If the connecting fails, try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

## What's the App User Interface Like ?

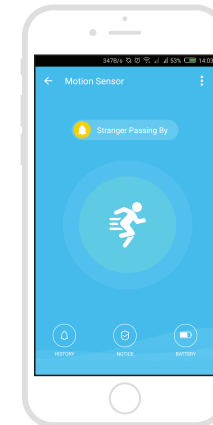

Smart life

## Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

### Main fuction

- Operate status: alarm/normal (the device can be triggered only once in 1 minute)
- Alarm recording (click "HISTORY").
- Turn Off/On push notification (click "NOTICE").

### Linkage alarm setting

- To connect two Sensors via scene setting.

### Device sharing

- Allow others to control the device

### Push notification

- Open/close push notification

### Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter